



Model Number U6115 Hybrid Coupler

Rev. a
3/28/05

Features:

- Low Loss
- Built-in Lowpass Filter


Applications:

- Missile
- Booster
- Test Equipment

Package size:

- 0.5 x 1.5 x 2.0"

(Please see outline for exact dimensions)

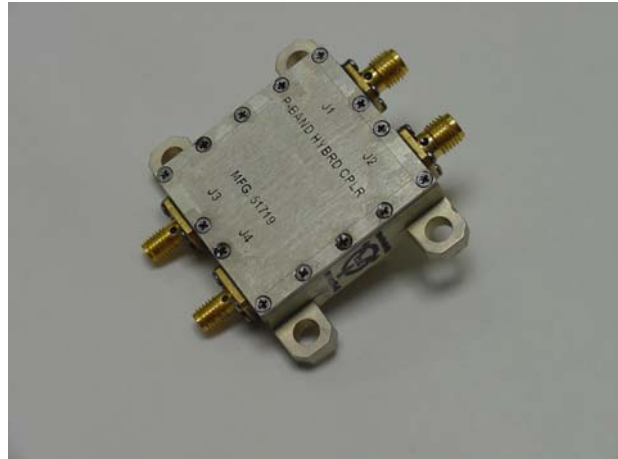

Specifications: (+25C)

Passband	400 - 450 MHz
Insertion Loss	0.8 dB
VSWR	1.2:1
Isolation	20 dB Minimum
Amplitude Balance	+/- 0.35 dB
Rejection	60 dB from 2200 to 2290
Phase Balance	90 +/-5 degrees
Power Handling	18 Watts
Connectors	SMA Female, SSMA Female



Delta Microwave

1301 Vanguard Dr.
Oxnard, CA. 93033

Phone: 805.240.1044
Fax: 805.240.9544

email: sales@deltamicrowave.com
www.deltamicrowave.com

--	--

By

Checked